



—Better shifting experience

MY2025



S-Ride Bicycle Components (Foshan) Co.,Ltd



www.s-ride.net

Add : No. 401 , 4th Floor of 1st Building , Haohong Industrial Park ,
No. 39 of Shunxiang Road , Daliang , Shunde , Foshan , Guangdong , P.R.C.
Zip : 528300
Tel : 86-757-25527777
E-mail : Larry@s-ride.net
Sales@s-ride.net

▶ ABOUT US

S-Ride Bicycle Components (Foshan) Co., Ltd. is a high-end bicycle components manufacturer. We have attained TUV ISO9001 quality system certification and is recognized as a high-tech enterprise and a specialized & innovative company in Guangdong. We focus on premier quality design, manufacture and distribution for MTB components, Road Bike components, Gravel components , Electric Bike components, Folding Bike components, Easy Shifter components. Each product is in accordance with international standards and perform with the same specs used by current worldwide leading bicycle component manufacturers.

Our mission and target are: to produce high value on premier quality, timely delivery, and good service on bicycle components.

▶ Our Main Focus Is On:

- ◆ MTB components: Twist Shifter, Trigger Shifter, Front Derailleur, Rear Derailleur, Cassette
- ◆ Road Bike components: Hydraulic Disc Brake Dual Control Lever, Mechanical Dual Control Lever,Front Derailleur, Rear Derailleur, Cassette, Hydraulic Disc Brake Caliper
- ◆ Gravel components: Hydraulic Disc Brake Dual Control Lever,Rear Derailleur, Cassette, Hydraulic Disc Brake Caliper
- ◆ Electric Bike components: Twist Shifter, Trigger Shifter, Front Derailleur, Rear Derailleur, Cassette
- ◆ Folding Bike components: Trigger Shifter, Front Derailleur, Rear Derailleur, Cassette
- ◆ Easy Shifter components: Trigger Shifter, Rear Derailleur, Cassette



www.s-ride.net



Official Account



—PRODUCT INDEX—

NEW Road Lineup	
R610 Hydraulic Series	P2
R510 Hydraulic Series	P5
R410 Hydraulic Series	P8
R400 Mechanical Series	P11

NEW Gravel Lineup	
GR680 Hydraulic Series	P14
GR580 Hydraulic Series	P16

MTB Lineup	
NEW M600 Series	P19
NEW M500-DH Series	P21
M500 Series	P23
M400 Series	P25
M300 Series	P27

NEW Easy Shifter Lineup	
K500 Series	P32
K300 Series	P34
K200 Series	P35

Folding Lineup	
M500 Series	P38
M400 Series	P39
M300 Series	P40
M200 Series	P41

Electric Bike Lineup	
D300 Series	P43
D200 Series	P44
E600 Series	P46
E500 Series	P47

Twist Shifter Lineup	P49
----------------------	-----

Special Specifications Lineup	P51
-------------------------------	-----

Technical Data	P52
----------------	-----

Road Lineup

Grip the dropbar firmly, experience the wonderful fusion of power and speed. Riding through the city into calm nature, each shifting brings a reach for freedom.

R610 Hydraulic Disc Brake Series

For 1/2x11/12 Drivetrain

- Easy to operate, Brake Lever for down, Release Lever for up
- TITAC Platform
- Left Lever With micro-index
- Metallic gearing, Amazing "TICTAC"
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable



ST-R610-R

ST-R610-L

ST-R610-L/ST-R610-R

R610 Dual Control Lever Hydraulic

Easy to operate, BL for down, RL for up

Model No	ST-R610-L/R
Speed	1/2x11/12s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	1750/2150
Brake	Hydraulic
Oil	Mineral
Brake Hose	Compatible with BH59
Avg. Weight	597g/Pair

**FD-R500****R500 Front Derailleur**

Cable Tension Adjustment

Model No	FD-R500
Speed	2s
Color	Dark Gray
Mounting Type	Brazed-On /Clamp
Cable Routing	Down Pull
Cage	Steel
Chain Line	43.5mm
Top Gear Teeth	34-50T/36-52T
Capacity	16T
Chainstay Angle	61-66°
Avg. Weight	102g/129g

**RD-R600****R600 Rear Derailleur**

Cable Tension Adjustment, Smoothly shift, Durable and Stable

Model No	RD-R600
Speed	11/12s
Color	Dark Gray
Cage	Aluminum
Max. Sprocket	34T
Capacity	39T
Avg.weight	219g

**BR-R510-F/R****R510 Hydraulic Disc Brake Caliper**

Model No	BR-R510-F/R
Brake	Hydraulic
Color	Matte Black
Oil	Mineral
Piston	2
Compatible Rotor	140mm/160mm
Brake Hose	Compatible With BH59
Avg. Weight	118g

CS-R500/CS-R400

- 11/12s
- 11-28/30/32/34T
- Silver
- High-strength alloy steel gears, good endurance
- Installation height : 36.5mm



Lineup	Specifications	Shifting				Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Derailleur	Front Caliper	Rear Caliper	
R610	1/2x12 Hydraulic	ST-R610-L	ST-R610-R	RD-R600	FD-R500	BR-R510-F	BR-R510-R	CS-R500 CS-R400
R610	1/2x11 Hydraulic	ST-R610-L	ST-R610-R					

R510 Hydraulic Disc Brake Series

For 1/2x10 Drivetrain

- Easy to operate, Brake Lever for down, Release Lever for up
- TITAC Platform
- Left Lever With micro- index
- Metallic gearing , Amazing “TICTAC”
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable

Road Lineup



ST-R510-R

ST-R510-L

ST-R510-L/ST-R510-R

R510 Dual Control Lever Hydraulic

Easy to operate, BL for down, RL for up

Model No	ST-R510-L/R
Speed	1/2x10s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	1750/2150
Brake	Hydraulic
Oil	Mineral
Brake Hose	Compatible With BH59
Avg. Weight	597g (/Pair)



Brazed-On

Clamp

FD-R500

R500 Front Derailleur

Cable Tension Adjustment

Model No	FD-R500
Speed	2s
Color	Dark Gray
Mounting Type	Brazed-On /Clamp
Cable Routing	Down Pull
Cage	Steel
Chain Line	43.5mm
Top Gear Teeth	34-50T/36-52T
Capacity	16T
Chainstay Angle	61-66°
Avg. Weight	102g/129g

Road Lineup



RD-R500

R500 Rear Derailleur

Cable Tension Adjustment, Smoothly shift, Durable and Stable

Model No	RD-R500
Speed	10s
Color	Dark Gray
Cage	Aluminum
Max. Sprocket	34T
Capacity	39T
Avg.weight	226g



BR-R510-F/R

R510 Hydraulic Disc Brake Caliper

Model No	BR-R510-F/R
Brake	Hydraulic
Color	Matte Black
Oil	Mineral
Piston	2
Compatible Rotor	140mm/160mm
Brake Hose	Compatible With BH59
Avg. Weight	118g

CS-R400

- 10s
- 11-28/30/32/34T
- Silver
- High-strength alloy steel gears, good endurance



Lineup	Specifications	Shifting				Brake		Cassette
		Left Lever	Left Lever	Rear Derailleur	Front Derailleur	Front Caliper	Rear Caliper	
R510	1/2x10s Hydraulic	ST-R510-L	ST-R510-R	RD-R500	FD-R500	BR-R510-F	BR-R510-R	CS-R400

R410 Hydraulic Disc Brake Series

For 1/2x8/9 Drivetrain

- Easy to operate, Brake Lever for down, Release Lever for up
- TITAC Platform
- Left Lever With micro- index
- Metallic gearing , Amazing “TICTAC”
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable



ST-R410-L/ST-R410-R

R410 Dual Control Lever Hydraulic

Easy to operate, BL for down, RL for up

Model No	ST-R410-L/R
Speed	1/2x8/9s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	1750/2150
Brake	Hydraulic
Oil	Mineral
Brake Hose	Compatible With BH59
Avg. Weight	590g (/Pair)



ST-R410-R

ST-R410-L

**FD-R400****R400 Front Derailleur**

Cable Tension Adjustment

Model No	FD-R400
Speed	2s
Color	Dark Gray
Mounting Type	Brazed-On /Clamp
Cable Routing	Down Pull
Cage	Steel
Chain Line	43.5mm
Top Gear Teeth	34-50T/36-52T
Capacity	16T
Chainstay Angle	61-66°
Avg. Weight	102g/129g

**RD-R400****R400 Rear Derailleur**

Cable Tension Adjustment, Smoothly shift, Durable and Stable

Model No	RD-R400
Speed	8/9s
Color	Dark Gray
Cage	Steel
Max. Sprocket	34T
Capacity	39T
Avg.weight	291g

**BR-R510-F/R****R510 Hydraulic Disc Brake Caliper**

Model No	BR-R510-F/R
Brake	Hydraulic
Color	Matte Black
Oil	Mineral
Piston	2
Compatible Rotor	140mm/160mm
Brake Hose	Compatible With BH59
Avg. Weight	118g

CS-R300

- 8/9s
- 11-28/30/32/34T
- Silver
- High-strength alloy steel gears, good endurance



Lineup	Specifications	Shifting				Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Derailleur	Front Caliper	Rear Caliper	
R410	1/2x8/9 Hydraulic	ST-R410-L	ST-R410-R	RD-R400	FD-R400	BR-R510-F	BR-R510-R	CS-R300

R400 Mechanical Series

For 1/2x8/9 Drivetrain

- Easy to operate, Brake Lever for down, Relaease Lever for up
- TITAC Platform
- Left Lever With micro- index
- Metallic gearing , Amazing “TICTAC”
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable



ST-R400-R


ST-R400-L

ST-R400-L/ST-R400-R

R400 Dual Control Lever Mechanical

Easy to operate, BL for down, RL for up

Model No	ST-R400-L/R
Speed	1/2x8/9s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	1750/2150
Brake	Mechanical
Avg. Weight	520g (/Pair)

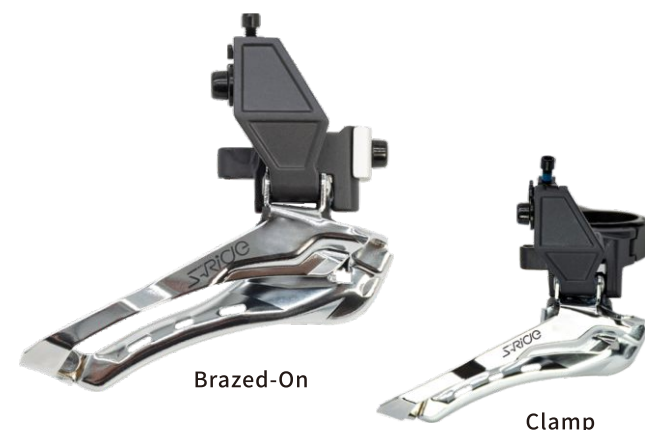

Brazed-On

Clamp

FD-R400

R400 Front Derailleur

Cable Tension Adjustment

Model No	FD-R400
Speed	2s
Color	Dark Gray
Mounting Type	Brazed-On /Clamp
Cable Routing	Down Pull
Cage	Steel
Chain Line	43.5mm
Top Gear Teeth	34-50T/36-52T
Capacity	16T
Chainstay Angle	61-66°
Avg. Weight	102g/129g



RD-R400

R400 Rear Derailleur

Cable Tension Adjustment, Smoothly shift, Durable and Stable

Model No	RD-R400
Speed	8/9s
Color	Dark Gray
Cage	Steel
Max. Sprocket	34T
Capacity	39T
Avg.weight	291g



CS-R300

- 8/9s
- 11-28/30/32/34T
- Silver
- High-strength alloy steel gears, good endurance

Lineup	Specifications	Shifting				Brake	Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Derailleur		
R400	1/2x8/9s Mechanical	ST-R400-L	ST-R400-R	RD-R400	FD-R400	Mechanical	CS-R300

Gravel Lineup

Embrace the thrill of speed and adventure, challenge the limits in the urban jungle or the wild unknown, embarking on a unique cycling journey.

GR680 Hydraulic Disc Brake Series

For 1x11/12s Drivetrain

- Easy to operate, Brake Lever for down, Release Lever for up
- TITAC Platform
- Metallic gearing, Amazing "TICTAC"
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable



ST-R610-R

ST-R610-L

ST-R610-L/ST-R610-R

R610 Dual Control Lever Hydraulic

Easy to operate, BL for down, RL for up

Model No	ST-R610-L/R
Speed	1x11/12s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	2150
Brake	Hydraulic
Oil	Mineral
Brake Hose	Compatible With BH59
Avg. Weight	541g (/Pair)



RD-GR680
GR680 Rear Derailleur
Cable Tension Adjustment, Smoothly shift,
Strong Clutch

Model No	RD-GR680
Speed	11/12s
Color	Dark Gray
Cage	Aluminum
Clutch	✓
Max. Sprocket	50T
Capacity	41T
Avg. Weight	321g



CS-M600
Cassette
• 11/12s
• 11-46/50T
• High-strength alloy steel gears,
good endurance

Lineup	Specifications	Shifting			Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Caliper	Rear Caliper	
GR680	1x12s Hydraulic	ST-R610-L	ST-R610-R	RD-GR680	BR-R510-F	BR-R510-R	CS-M600
GR680	1x11s Hydraulic	ST-R610-L	ST-R610-R				



BR-R510-F/R
R510 Hydraulic Disc Brake Caliper

GR580 Hydraulic Disc Brake Series

For 1x10s Drivetrain

- Easy to operate, Brake Lever for down, Release Lever for up
- TITAC Platform
- Metallic gearing, Amazing “TICTAC”
- Good quality cover fits well, Ergonomic design
- Independent functional parts, Integration, Easy maintenance
- Easy exchange cable



ST-R510-R

ST-R510-L

ST-R510-L/ST-R510-R
R510 Dual Control Lever Hydraulic
Easy to operate, BL for down, RL for up

Model No	ST-R510-L/R
Speed	1x10s
Color	Dark Gray
Mounting Position	Left/Right
Brake Lever Clamp Band (mm)	23.8-24.2
Brake Lever	Aluminum
Cable Length (mm)	2150
Brake	Hydraulic
Oil	Mineral
Brake Hose	Compatible With BH59
Avg. Weight	541g (/Pair)



RD-GR580

GR580 Rear Derailleur

Cable Tension Adjustment, Smoothly shift, Strong Clutch

Model No	RD-GR580
Speed	10s
Color	Dark Gray
Cage	Steel
Clutch	✓
Max. Sprocket	50T
Capacity	41T
Avg. Weight	381g



CS-M400

Cassette

- 10s
- 11-42/46/50T
- High-strength alloy steel gears, good endurance



BR-R510-F/R

R510 Hydraulic Disc Brake Caliper

Lineup	Specifications	Shifting			Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Caliper	Rear Caliper	
GR580	1x10s Hydraulic	ST-R510-L	ST-R510-R	RD-GR580	BR-R510-F	BR-R510-R	CS-M400

MTB Lineup

Riding through rugged mountains, whether you're climbing uphill or going downhill, it can maintain smooth and stable gear shifting.

Gravel Lineup

MTB Lineup

M600 MTB Lineup

- High-end MTB parts, With Strong Clutch, Anti-drop chain
- 1x12s, compatible with 11-46/50/52T Cassette
- 1x13s, compatible with 11-50T Cassette
- 12/13s is compatible with 12s chain from KMC and chainwheel & crank from Prowheel
- 13s special hub, installation height 37.5mm



SL-M610

M610 Trigger Shifter

Metallic gearing, Timely respond, Smoothly shift

Model No	SL-M610
Speed	12/13s
Color	Jet Black/Carbon Black/Black
Cable Ratio	1:1
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2150
Window	Without Window
Compatible RD	12/13s
Avg. Weight	128g



RD-M620

M620 Rear Derailleur

Trapezoidal design, Smoothly shift, Strong clutch

Model No	RD-M620
Speed	12/13s
Color	Jet Black/Carbon Black/Black
Cage	Aluminum
Clutch	✓
Max. Sprocket	52T
Capacity	43T
Acutation Ratio	1:1
Avg. Weight	315g



CS-M600/CS-M700

Cassette

Black+Silver/Gold + Black

- 12/13s
- 11-46/50/52T
- Smoothly & precisely shift
- Optimized gear assembly, efficiently drive
- High strength alloy gear, good endurance

Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
M600	1x12/13s	SL-M610	RD-M620	CS-M600

DOWN HILL Bike Lineup

M500-DH Parts

- 1×10s System
- Compatible with 11-28/30/32T Cassette

Trigger Shifter

- Strong Body, Metallic gearing
- Timely respond--"Zero delay"
- Better ergonomic design

Rear Derailleur

- Trapezoidal design, Smoothly shift
- Stronger Clutch



SL-M500-DH

M500-DH Trigger Shifter

Metallic gearing, Timely respond, Smoothly shift

Model No	SL-M500-DH
Speed	10s
Color	Jet Black/Carbon Black/Black
Cable Ratio	1:1
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2150
Window	Without Window
Compatible RD	10s
Avg. Weight	110g

M500-DH

RD-M500-DH

M500-DH Rear Derailleur

Trapezoidal design, Smoothly shift, Strong clutch

Model No	RD-M500-DH
Speed	10s
Color	Jet Black/Carbon Black/Black
Cage	Steel
Clutch	√
Max. Sprocket	32T
Capacity	21T
Acutation Ratio	1:1
Avg. Weight	315g



Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
M500-DH	1x10s	SL-M500-DH	RD-M500-DH	CS-M400

M500 MTB Bike Lineup

- M510 1x11/12s
- M500 1/2/3x11/12s, Compatible With 11-42/46/50T Cassette
- Rear Derailleur With/Without Clutch



SL-M510

SL-M500

SL-M500/SL-M510

M500 Trigger Shifter

Timely respond, Smoothly shift

Model No	SL-M500/SL-M510
Speed	11/12s
Color	Jet Black
Cable Ratio	1:1
Clamp/Diameter (mm)	22.2
Cable Length (mm)	2253
Window	With/without Window
Compatible RD	11/12s
Avg. Weight	124g/110g



RD-M520

M520 Rear Derailleur

Trapezoidal design, Smoothly shift, Strong clutch

Model No	RD-M520
Speed	11/12s
Color	Black
Cage	Steel
Clutch	✓
Max. Sprocket	52T
Capacity	43T
Actuation Ratio	1:1
Avg. Weight	381g



CS-M500 11s Black+Silver 46T

11-50/52T

CS-M500

11/12s Cassette

- Smoothly & precisely shift
- Optimized gear assembly, efficiently drive
- High strength alloy gear, good endurance

Product Name	Description
CS-M500 11s 46T	11SPD, Silver/Ph Black, Black AL-spider, CS-M500111146, 11-13-15-18-21-23-26-30-34-40-46T
CS-M500 11s 50T	11SPD, Silver/Ph Black, Black AL-spider, CS-M500111150, 11-13-15-18-21-24-28-32-36-42-50T
CS-M500 11s 50T	11SPD, Ph Black, Black AL-spider, CS-M500111150, 11-13-15-18-21-24-28-32-36-42-50T
CS-M500 12s 46T	12SPD, Silver/Ph Black, Black AL-spider, CS-M500121146, 11-13-15-17-19-21-24-28-32-36-40-46T
CS-M500 12s 50T	12SPD, Ph Black, Black AL-spider, CS-M500121150, 11-13-15-17-19-21-24-28-32-36-42-50T
CS-M500 12s 50T	12SPD, Silver/Ph Black, Black AL-spider, CS-M500121150, 11-13-15-17-19-21-24-28-32-36-42-50T

Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
M500	1x11/12s	SL-M500	RD-M520	CS-M500
	1/2/3x11/12s	SL-M500	RD-M500/RD-M500C	

M400 MTB Bike Lineup

- M400 the advanced MTB parts
- 1/2/3x10/ 11s, overlength cage RD is compatible with 11-40/42T Cassette
- 2/3x10s, long/short cage RD is compatible with 32/36T Cassette



SL-M400

M400 Trigger Shifter

Timely response, Crisp shifting, "Zero delay"

Model No	SL-M400
Speed	1/2/3x10/11s
Color	Jet Black/Silver/Black
Cable Ratio	1:1
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2253
Window	With Window
Compatible RD	10/11s
Avg. Weight	212g/pair

RD-M400

M400 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M400
Speed	10/11s
Color	Jet Black/Silver/Black
Cage length	Overlength
Cage	Steel
Max. Sprocket	42T
Capacity	49T
Actuation Ratio	1:1
Avg. Weight	305g



FD-M400

M400 Front Derailleur

Quickly respond, Smoothly shift ,Stable and strong

Model No	FD-M400
Speed	2/3s
Color	Black/Silver/Jet Black
Cage	Steel
Cable Routing	Dual Pull
Chainstay Angle	66-69°
Capacity	14/22T
Mount position	Low Clamp
Avg. Weight	141g/153g

RD-M400

M400 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M400
Speed	10/11s
Color	Jet Black/Black
Cage length	Long/Short
Cage	Steel
Max. Sprocket	42T/36T
Capacity	45T(L), 35T(S)
Actuation Ratio	1:1
Avg. Weight	300g(L) /296g(S)

Diameter \ N.W(g)	Double	Triple
φ 34.9mm	138	150
φ 31.8mm	141	153
φ 28.6mm	143	155

Chain Ring	Triple	Double	Triple	Double
Compatible RD	11/12-speed		10-speed	
Top Gear Teeth	48-38-28T	48-36T	48-38-28T	48-36T
	44-32-22T	42-30T	44-32-22T	42-30T
	42-32-24T	40-28T	42-32-24T	40-28T
	42-32-22T	36-22T	42-32-22T	36-22T
Capacity	40-30-22T		40-30-22T	
	22T	14T	22T	14T
Chain Line	50.0mm	48.5mm	50.0mm	48.5mm
Diameter	28.6/31.8/34.9mm			

Lineup	Specifications	Shifting				Cassette
		Trigger Shifter-L	Trigger Shifter-R	Front Derailleur	Rear Derailleur	
M400	1/2/3x10/11s	SL-M400 2/3s	SL-M400 10/11s	FD-M400	RD-M400	CS-M400

M300 MTB Bike Lineup

- M300/M310/M320 MTB parts
- M300/M310 1/2/3x8/9s System
- M320 1/2x10/11/12s System



CS-M320/M400/M500

Cassette

- 10/11/12s
- Smoothly & precisely shift
- Optimized gear assembly,efficiently drive
- High strength alloy gear, good endurance



SL-M320

M320 Trigger Shifter

Timely respond,Smoothly shift

Model No	SL-M320
Speed	1/2x10/11/12s
Color	Black
Cable Ratio	1:1
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2253
Window	With/without Window
Compatible RD	10/11/12s
Avg. Weight	124g/110g



RD-M320/RD-M320C

M320/M320C Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M320/RD-M320C
Speed	10/11/12s
Color	Black
Cage length	Overlength
Cage	Steel
Clutch	√ (RD-M320C)
Max. Sprocket	50T
Capacity	49T
Actuation Ratio	1:1
Avg. Weight	345g



SL-M300/SL-M300C

M300/M300C Trigger Shifter

Timely respond,Smoothly shift

Model No	SL-M300/SL-M300C
Speed	2/3x8/9s
Color	Black
Cable Ratio	1:2(M300) / 1:1(M300C)
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2253
Window	With Window
Compatible RD	8/9s
Avg. Weight	212g/pair



RD-M300

M300 Rear Derailleur

Quickly respond, Smoothly shift

Model No	RD-M300
Speed	8/9s
Color	Black/Silver
Cage length	Long/Short
Cage	Steel
Max. Sprocket	36T
Capacity	45T(L), 35T(S)
Actuation Ratio	2:1
Avg. Weight	285g(L)/275g(S)



RD-M300 (OL)

RD-M310

RD-M300C/RD-M310

M300C/M310 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M300C/RD-M310
Speed	8/9s
Color	Black/Silver
Cage length	Overlength/Long/Short
Cage	Steel
Clutch	√ (M300C)
Max. Sprocket	42T(OL)/36T(L)/36T(S)
Capacity	49T(OL), 45T(L), 35T(S)
Actuation Ratio	1:1
Avg. Weight	308g(OL)/281g(L) /275g(S)



FD-M300

M300 Front Derailleur

Quickly respond, Smoothly shift, Stable and strong

Model No	FD-M300
Speed	2/3s
Color	Black/Silver
Cage	Steel
Cable Routing	Dual Pull
Chainstay Angle	66-69°
Capacity	14/22T
Mount position	Low Clamp
Avg. Weight	153g

CS-M300

Cassette

- 11-32/34/36/40/42T
- Smoothly & precisely shift
- Optimized gear assembly, efficiently drive
- High strength alloy gear, good endurance



Chain Ring	Double	Triple	Triple
Compatible RD	8/9-speed	8-speed	9-speed
Top Gear Teeth	48-36T	48-38-28T	48-38-28T
	42-30T	44-32-22T	44-32-22T
	40-28T	42-32-24T	42-32-24T
	36-22T	42-32-22T	42-32-22T
	/	40-30-22T	40-30-22T
Capacity	14T	22T	22T
Chain Line	48.5mm	50.0mm	50.0mm
Diameter	28.6/31.8/34.9mm	28.6/31.8/34.9mm	28.6/31.8/34.9mm

Lineup	Specifications	Shifting				Cassette
		Trigger Shifter-L	Trigger Shifter-R	Front Derailleur	Rear Derailleur	
M300	1/2/3x8/9s	SL-M300 2/3s	SL-M300 8/9s SL-M300C 8/9s	FD-M300	RD-M300 RD-M300C/RD-M310	CS-M300 CS-M320
M320	1/2x10/11/12s	SL-M320 2s	SL-M320 10/11/12s	FD-M400	RD-M320	CS-M400 CS-M500

Easy Shifter Lineup

Easy to operate and specially designed for riders with small hands,
Making them enjoy biking.

Easy Shifter Lineup

K500 Easy Shifter Lineup

- 1x8/10s Series
- Compatible with 11-28/30/32T Cassette
- Smoothly Shift, Precisely Shift, stable and Light
- Cute Design, Colorful
- Less by 22% in pulling force, Less by 30% in releasing force, Shorten by 42 % in pulling distance
- Quickly--"zero delay", Timely respond
- Clear--Metal integration spool, Amazing "tictac"



Green



Carbon Black

SL-K500

K500 Trigger Shifter

Smoothly and Precisely Shift, Stable and Light

Model No	SL-K500
Speed	8/10s
Color	Green/Carbon Black
Cable Ratio	1:1
Clamp/Diameter (mm)	22.2
Cable Length (mm)	2150
Window	With/without Window
Compatible RD	8/10s
Avg. Weight	124g/110g

Easy Shifter Lineup



Green



Carbon Black

RD-K500

K500 Rear Derailleur

Trapezoidal design, Quickly respond, Smoothly shift

Model No	RD-K500
Speed	8/10s
Color	Green/Carbon Black
Cage length	Super-short
Cage	Steel
Max. Sprocket	32T
Capacity	21T
Actuation Ratio	1:1
Avg. Weight	286g

! :with 10s chain and special cassette



CS-K500

Cassette

- 8/10s
- Silver
- 11-30/32T, Specified Cassette for Easy Shifter lineup, with 10s chain
- High strength alloy gear, good endurance



K300 Easy Shifter Lineup

- 1x8/10s Series
- Compatible with 11-28/30/32/36T Cassette
- Smoothly Shift ,Precisely Shift, stable and Light
- Cute Design, Colorful
- Quickly--" zero delay" ,Timely respond

SL-K300

K300 Trigger Shifter

Smoothly and Precisely Shift, Stable and Light

Model No	SL-K300
Speed	8/9/10s
Color	Green/Black
Cable Ratio	1:1/1:2
Clamp/Diameter (mm)	22.2
Cable Length (mm)	2253
Window	With/without Window
Compatible RD	8/9/10s
Avg. Weight	122g/110g



RD-K300

K300 Rear Derailleur

Quickly respond, Smoothly shift

Model No	RD-K300
Speed	8/9/10s
Color	Green/Black
Cage length	Short/Super-short
Cage	Steel
Max. Sprocket	36T(S), 32T(SS)
Capacity	35T(S), 23T(SS)
Actuation Ratio	1:1/2:1
Avg. Weight	281g/275g



K200 Easy Shifter Lineup

- Cute Design,Colorful



SL-K200

K200 Trigger Shifter

Smoothly and Precisely shift ,Stable and Light

Model No	SL-K200
Speed	7/8/9s
Color	Series color
Cable Ratio	1:1/1:2
Clamp/Daimeter (mm)	22.2
Cable Length (mm)	2253
Window	With Window
Compatible RD	7/8/9s
Avg. Weight	125g



RD-K200

K200 Rear Derailleur

Quickly respond, Smoothly shift

Model No	RD-K200
Speed	7/8/9s
Color	Series color
Cage length	Short
Cage	Steel+ Composite
Max. Sprocket	36T
Capacity	35T
Actuation Ratio	1:1/2:1
Avg. Weight	239g



Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
K500	1x8/10s	SL-K500	RD-K500	CS-K500
K300	1x8/9/10s	SL-K300	RD-K300	CS-M300
K200	1x7/8/9s	SL-K200	RD-K200	CS-M300

Folding Bike Lineup

Designed for small wheels, our kit offers flexibility and convenience. Whether cycling through busy city streets or riding on peaceful park paths, it's the perfect companion for your life.



M500 Folding Bike Lineup

- 1x10/11s the advanced Folding bike parts
- RD-M500 ,short/supershort cage
- Compatible with 11-28/32/36T Cassette
- Jet Black/ Black



SL-M500/SL-M510

M500/M510 Trigger Shifter

Quickly response, Crisply shift, Lossless release

Model No	SL-M500/SL-M510
Speed	11s
Color	Jet Black
Cable Ratio	1:1
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With/Without window
Compatible RD	11s
Avg. weight	124g/110g



RD-M500

M500 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M500
Speed	11s
Color	Jet Black
Cage length	Short/ Supershort cage
Cage	Steel
Max. Sprocket	36T(S)/ 32T(SS)
Capacity	35T(S)/ 23T(SS)
Acutation Ratio	1:1
Avg. weight	300g(S)/ 276g(SS)

M400 Folding Bike Lineup



SL-M400

M400 Trigger Shifter

Quickly response, Crisply shift, Lossless release

Model No	SL-M400
Speed	10/11s
Color	Black/Silver
Cable Ratio	1:1
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With/Without window
Compatible RD	10/11s
Avg. weight	124g/110g

RD-M400

M400 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M400
Speed	10/11s
Color	Jet Black/Black/Silver
Cage length	Short/ Supershort cage
Cage	Steel
Max. Sprocket	36T(S)/ 32T(SS)
Capacity	35T(S)/ 23T(SS)
Acutation Ratio	1:1
Avg. weight	300g(S)/ 276g(SS)

M300 Folding Bike Lineup

- 1x8/9s the advanced Folding bike parts
- Compatible with 11-28/32/36T Cassette
- Rear Derailleur--Short/Super short cage



SL-M300/SL-M300C

M300/M300C Trigger Shifter

Quickly response, Crisply shift, Lossless release

Model No	SL-M300/SL-M300C
Speed	8/9s
Color	Jet Black/Black
Cable Ratio	1:1(M300C)/1:2(M300)
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With/Without window
Compatible RD	8/9s
Avg. weight	124g/110g



RD-M300/RD-M310

M300/M310 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M300/RD-M310
Speed	8/9s
Color	Jet Black/Black
Cage length	Short/ Supershort cage
Cage	Steel
Max. Sprocket	36T(S)/ 32T(SS)
Capacity	35T(S)/ 23T(SS)
Acutation Ratio	1:1(M310)/2:1(M300)
Avg. weight	296g(S)/ 276g(SS)

M200 Folding Bike Lineup



SL-M300

M300 Trigger Shifter

Quickly response, Crisply shift, Lossless release

Model No	SL-M300
Speed	6/7s
Color	Black
Cable Ratio	1:2
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With window
Compatible RD	6/7s
Avg. weight	124g



RD-M200/RD-M210

M200/M210 Rear Derailleur

Quickly response, Smoothly and Precisely shift

Model No	RD-M200/RD-M210
Speed	6/7s
Color	Black/Silver
Cage length	Short/ Supershort cage
Cage	Steel+Composite
Max. Sprocket	36T(S)/ 32T(SS)
Capacity	35T(S)/ 23T(SS)
Acutation Ratio	2:1 (M200) /1:1 (M210)
Avg. weight	269g(S)/ 248g(SS)

Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
M500	1x11s	SL-M510	RD-M500	CS-M400
M400	1x10/11s	SL-M400	RD-M400	CS-M400
M300	1x8/9s	SL-M300	RD-M300	CS-M300
M200	1x6/7s	SL-M200	RD-M200	CS-M300

E-Bike Lineup

Seamless integration of gear shifting and throttle, makes driving effortless and enjoyable.



Folding Bike Lineup

E-bike Lineup

D300/D200 E-Bike Lineup

- D300 is the advanced E-Bike parts
- 1x6/7/8/9s,Long /Short Cage RD is compatible with 32/36T Cassette
- Integration of trigger shifter and throttle lever
- Easy to control riding



DSL-D200

D200 Dual Shift Lever

Integrated shifting and acceleration,Easy to operate

Model No	DSL-D200
Speed	6/7s
Color	Black
Power	Working Voltage 5V, Output Voltage 0.8-4.2V
Waterproof & Dustproof	IPX5
Cable Ratio	1:2
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With window
Compatible RD	6/7s
Avg. weight	192g



RD-D200

D200 Rear Derailleur

Quickly response, smoothly and precisely shift

Model No	RD-D200
Speed	6/7s
Color	Black
Cage length	Long/ Short cage
Cage	Steel
Max. Sprocket	36T(L)/ 32T(S)
Capacity	45T(L)/ 35T(S)
Acutation Ratio	2:1
Avg. weight	238g(L)/ 269g(S)

CS-M200/M300

Cassette

- 8/9s,11/13-28/32/34/36T
- Smoothly & precisely shift
- Optimized gear assembly,efficiently drive
- High strength alloy gear,good endurance



Lineup	Specifications	Shifting		Cassette
		Dual Shift Lever	Rear Derailleur	
D300 (1:2)	1x8/9s	DSL-D300	RD-D300	CS-M300 CS-M200
D310 (1:1)	1x8/9s	DSL-D310	RD-D310	
D200	1x6/7速	DSL-D200	RD-D200	



DSL-D300/DSL-D310

D300/D310 Dual Shift Lever

Integrated shifting and acceleration,Easy to operate

Model No	DSL-D300/DSL-D310
Speed	8/9s
Color	Black
Power	Working Voltage 5V, Output Voltage 0.8-4.2V
Waterproof & Dustproof	IPX5
Cable Ratio	1:2 (D300) /1:1 (D310)
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With window
Compatible RD	8/9s
Avg. weight	192g



RD-D300/RD-D310

D300/D310 Rear Derailleur

Quickly response, Smoothly and precisely shift

Model No	RD-D300/RD-D310
Speed	8/9s
Color	Black
Cage length	Long/ Short cage
Cage	Steel
Max. Sprocket	36T(L)/ 32T(S)
Capacity	45T(L)/ 35T(S)
Acutation Ratio	2:1 (D300) /1:1 (D310)
Avg. weight	281g(L)/ 274gT(S)



E-Bike Lineup

E-bike Lineup

E600 E-Bike Lineup

- 1x9s ,specified for E-Bike system
- RD-M520 compatible with 11-46/50T Cassette
- Good riding experience



SL-E600

E600 Trigger Shifter Single shift

Quickly response, Crisply shift, Lossless release

Model No	SL-E600
Speed	9s
Color	Jet Black
Cable Ratio	1:1
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	Without window
Compatible RD	9s
Avg. weight	128g



RD-M520

M520 Rear Derailleur

Trapezoidal design,Smoothly shift,Strong clutch

Model No	RD-M520
Speed	9s
Color	Black
Cage	Steel
Clutch	√
Max. Sprocket	52T
Capacity	43T
Acutation Ratio	1:1
Avg. Weight	381g

E-bike Lineup

E500 E-Bike Lineup

- 1x8s, specified for E-Bike system
- RD-M520, compatible with 11-42T Cassette



SL-E500

E500 Trigger Shifter Single shift

Quickly response, Crisply shift, Lossless release

Model No	SL-E500
Speed	8s
Color	Black
Cable Ratio	1:1
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With window
Compatible RD	8s
Avg. weight	124g



RD-M520

M520 Rear Derailleur

Trapezoidal design, Smoothly shift, Strong clutch

Model No	RD-M520
Speed	8s
Color	Black
Cage	Steel
Clutch	✓
Max. Sprocket	52T
Capacity	43T
Acutation Ratio	1:1
Avg. Weight	381g



CS-E600

E-Bike Cassette

- 9s, 11-46/50T
- Optimized gear assembly, efficiently drive
- High strength alloy gear good endurance



CS-E500

E-Bike Cassette

- 8s, 11-42T
- Optimized gear assembly, efficiently drive
- High strength alloy gear good endurance

E-Bike Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
E600	1x9s	SL-E600	RD-M520	CS-E600
E500	1x8s	SL-E500	RD-M520	CS-E500

SRD 35/36/45/46 Lineup

- New 3x6/7/8s system
- Combine the advantages of 2 top brands of twist shifter
- MTB, City, Trekking, Folding, Children, etc.
- Big force for derailleur to timely forward or back the chain



Black

Sliver

SRD45

Twist Shifter

(3s micro index/ 6s index/ 7s index/ 8s index)

- Easy exchange cable
- Accurate cable pull by clutch and spring shifting
- Ergonomic grip shape
- With window



Black

Sliver

SRD46

Twist Shifter

(3s micro index/ 6s index/ 7s index/ 8s index)

- Ergonomic grip-cover shape, improve griping

SRD Lineup	Specifications	Shifting		Cassette
		Twist Shifter	Rear Derailleur	
SRD45/46	3x6/7/8s	SRD45/46	RD-M200	CS-M300
SRD35/36	3x6/7/8s	SRD35/36		



Sliver

Black

SRD35

Twist Shifter

(3s micro index/ 6s index/ 7s index/ 8s index)

- Easy exchange cable
- Accurate cable pull by clutch and spring shifting
- Ergonomic grip shape
- Without window



Sliver

Black

SRD36

Twist Shifter

(3s micro index/ 6s index/ 7s index/ 8s index)

- Ergonomic grip-cover shape, improve griping



Sliver

Black

RD-M200

M200 Rear Derailleur

Quickly response, Smoothly and precisely shift

Model No	RD-M200
Speed	6/7s
Color	Black/Sliver
Cage length	Short/ Supershort cage
Cage	Steel+Composite
Max. Sprocket	36T(S)/ 32T(SS)
Capacity	35T(S)/ 23T(SS)
Acutation Ratio	2:1
Avg. weight	269g(S)/ 248gT(SS)

Special Specification Lineup

- Left shifter with Larger window
- Compatibility: Right trigger throttle or Right twist throttle
- Short linear movement of release system by piston design



Black

SL-M300-L

M300 Left Trigger Shifter

Quickly response, Crisply shift, Lossless release

Model No	SL-M300-L
Speed	6/7/8/9s
Color	Black
Cable Ratio	1:2
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	With window
Compatible RD	RD-M200
Avg. weight	110g



M300-R 3s

M300-R 5s

SL-M300-R

M300 Right Trigger Shifter

Quickly response, Crisply shift

Model No	SL-M300-R
Speed	3/5s
Color	Jet Black/Black
Cable Ratio	1:1
Clamp Diameter(mm)	22.2
Cable length(mm)	2253
Window	Without window
Compatible RD	RD-M210
Avg. weight	104g

Series Compatibility Sheet

Road Lineup	Specifications	Shifting				Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	Front Derailleur	BR-Front	BR-Rear	
R610	1/2x12s Hydraulic	ST-R610-L	ST-R610-R	RD-R600	FD-R500	BR-R510-F	BR-R510-R	CS-R500 CS-R400
R610	1/2x11s Hydraulic	ST-R610-L	ST-R610-R					
R510	1/2x10s Hydraulic	ST-R510-L	ST-R510-R	RD-R500				CS-R400
R410	1/2x8/9s Hydraulic	ST-R410-L	ST-R410-R	RD-R400	FD-R400			CS-R300
R400	1/2x8/9s Mechanical	ST-R400-L	ST-R400-R					CS-R300

Gravel Lineup	Specifications	Shifting			Brake		Cassette
		Left Lever	Right Lever	Rear Derailleur	BR-Front	BR-Rear	
GR680	1x12s Hydraulic	ST-R610-L	ST-R610-R	RD-GR680	BR-R510-F	BR-R510-R	CS-M600
GR680	1x11s Hydraulic	ST-R610-L	ST-R610-R				CS-M500
GR580	1x10s Hydraulic	ST-R510-L	ST-R510-R	RD-GR580			CS-M400

MTB Lineup	Specifications	Shifting			Cassette
		Trigger Shifter	Front Derailleur	Rear Derailleur	
M620	1x12/13s	SL-M610	-	RD-M620	CS-M600
M500-DH	1x10s	SL-M500-DH	-	RD-M500-DH	CS-M400
M510/M500	1x11/12s	SL-M510/SL-M500	-	RD-M520	CS-M500
M500	1/2/3x11/12s	SL-M500	FD-M400	RD-M500	CS-M500
M400	1/2/3x10/11s	SL-M400	FD-M400	RD-M400	CS-M400
M320	1/2x10/11/12s	SL-M320	FD-M400	RD-M320	CS-M320
M310	1/2/3x8/9s	SL-M300C	FD-M300	RD-M310	CS-M300
M300	1/2/3x8/9s	SL-M300	FD-M300	RD-M300	

Series Compatibility Sheet

Easy Shifter Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
K500	1x8/10s	SL-K500	RD-K500	CS-K500
K300	1x8/9/10s	SL-K300	RD-K300	CS-M300
K200	1x7/8/9s	SL-K200	RD-K200	CS-M300

Folding Bike Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
M500	1x11s	SL-M510	RD-M500	CS-M500
M400	1x10/11s	SL-M400	RD-M400	CS-M400
M300	1x8/9s	SL-M300	RD-M300	CS-M300
M200	1x6/7s	SL-M200	RD-M200	CS-M300

E-Bike Lineup	Specifications	Shifting		Cassette
		Trigger Shifter	Rear Derailleur	
D300	1x8/9s	DSL-D300	RD-D300	CS-M300 CS-M200
		DSL-D310	RD-D310	
D200	1x6/7s	DSL-D200	RD-D200	
E600	1x9s	SL-E600	RD-M520	CS-E600
E500	1x8s	SL-E500	RD-M520	CS-E500

SRD Lineup	Specifications	Shifting		Cassette
		Twist Shifter	Rear Derailleur	
SRD45/46	3x6/7/8s	SRD45/46	RD-M200	CS-M200
SRD35/36	3x6/7/8s	SRD35/36		

Road/Gravel Component Technical Specifications Sheet

Road Bike Front Derailleur		
Series	FD-R500	FD-R400
Chain Ring	Double	Double
Compatible RD	10/11/12s	8/9s
Top Gear Teeth	34-50T/36-52T	34-50T/36-52T
Capacity	16T	16T
Cable Routing	Down Pull	Down Pull
Chainstay Angle	61-66°	61-66°
Mounting Type	Brazed-On /Clamp	
Chain Line (mm)	43.5mm	
Cage	Steel	Steel
Outer Link	Aluminum	Aluminum
Inner Link	Aluminum	Aluminum
Avg. Weight	102g/129g	102g/129g
Color	Dark Gray	Dark Gray

Road/Gravel Bike Rear Derailleur					
Series	RD-R600	RD-R500	RD-R400	RD-GR680	RD-GR580
Cage	Long			Long	
Speed	11/12s	10s	8/9s	12s	10s
Max. Sprocket	34T	34T	34T	46/50T	46/50T
Min. Sprocket	11T	11T	11T	11T	11T
Max. Front Difference	16T	16T	16T	-	-
Capacity	39T	39T	39T	43T	43T
Guide Pulley	Composite With Bearing				
Tension Pulley	Composite With Bearing				
B-Knuckle	Aluminum				
B-Bolt	7075 Aluminum		Steel	7075 Aluminum	Steel
P-Knuckle	Composite				
P-Pivot Seal	Steel				
Outer Link	Aluminum				
Inner Link	Aluminum		Steel	Aluminum	Steel
Outer Cage	Aluminum		Steel	Aluminum	Steel
Inner Cage	Aluminum		Steel	Aluminum	Steel
Net Weight (g)	219g/pc	226g/pc	291g/pc	321g/pc	381g/pc
Color	Dark Gray				
Remark				With Clutch	

MTB Component Technical Specifications Sheet

MTB Front Derailleur							
Series	FD-M400				FD-M300		
Chain Ring	Triple	Double	Triple	Double	Double	Triple	Triple
For RD	11/12s		10s		8/9s	8s	9s
Top Gear Teeth	48-38-28T	48-36T	48-38-28T	48-36T	48-36T	48-38-28T	48-38-28T
	44-32-22T	42-30T	44-32-22T	42-30T	42-30T	44-32-22T	44-32-22T
	42-32-24T	40-28T	42-32-24T	40-28T	40-28T	42-32-24T	42-32-24T
	42-32-22T	36-22T	42-32-22T	36-22T	36-22T	42-32-22T	42-32-22T
	40-30-22T		40-30-22T			40-30-22T	40-30-22T
Capacity	22T	14T	22T	14T	14T	22T	22T
Rout Type	Dural Pull						
Chain Stay Angle	66-69°						
Mount Position	Low Clamp						
Chain Line	50.0mm	48.5mm	50.0mm	48.5mm	48.5mm	50.0mm	50.0mm
Tube Diameter(MM)	28.6/31.8/34.9mm						
Clamp	Steel						
Cage	Steel						
Outer Link	Aluminum						
Inner Link	Steel						
Net Weight (g)	150g(153/155)	138g(141/143)	150g(153/155)	138g(141/143)	138g(141/143)	150g(153/155)	151g(154/156)
Color	Jet Black / Black		Black /Silver				

MTB Rear Derailleur								
Series	RD-M620	RD-M520	RD-M500-DH	RD-M500C	RD-M500	RD-M400		
Cage	Long	Long	Super Short	Overlength	Overlength	Overlength	Long	Short
Speed	12/13s	10/11/12s	10s	11/12s	11/12s	10/11s	10s	10s
Max. Sprocket	52T	52T	32T	46/50/52T	46/50/52T	40/42T	36T	36T
Min. Sprocket	11T	11T	11T	11T	11T	11T	11T	11T
Max. Front Difference	-	-	-	-	-	18T	20T	18T
Capacity	43T	43T	23T	49T	49T	49T	45T	35T
Guide Pulley	Composite With Bearing						Composite With Steel Bushing	
Tension Pulley	Composite With Bearing						Composite With Steel Bushing	
B-Knuckle	Aluminum							
B-Bolt	7075 Aluminum	Steel	7075 Aluminum			Steel		
P-Knuckle	Composite							
P-Pivot Seal	Steel							
Outer Link	Aluminum							
Inner Link	Aluminum	Steel	Aluminum	Steel				
Outer Cage	Aluminum	Steel		Aluminum		Steel		
Inner Cage	Aluminum	Steel		Aluminum		Steel		
Net Weight (g)	286g	381g	315g	247g	247g	305g	299g	295g
Color	Series color	Black	Series color	Jet Black		Jet Black/Black	Black/Silver	Black/Silver
Remark	With New Clutch			With Clutch				

MTB Rear Derailleur						
Series	RD-M320C	RD-M320	RD-M300/M310			
Cage	Overlength	Overlength	Overlength	Long	Short	Super Short
Speed	10/11/12s	10/11/12s	8/9s	8/9s	8/9s	8/9s
Max. Sprocket	46/50/52T	46/50/52T	42T	36T	34T	32T
Min. Sprocket	11T	11T	11T	11T	11T	11T
Max. Front Difference	-	-	18T	20T	12T	-
Capacity	49T	49T	49T	45T	35T	23T
Guide Pulley	Composite With Bearing			Composite With Steel Bushing		Composite With Bearing
Tension Pulley	Composite With Bearing			Composite With Steel Bushing		Composite With Bearing
B-Knuckle	Aluminum			Composite		Aluminum
B-Bolt	Steel					
P-Knuckle	Composite					
P-Pivot Seal	Steel					
Outer Link	Aluminum					
Inner Link	Steel					
Outer Cage	Steel					
Inner Cage	Steel					
Net Weight (g)	345g	343g	308g	281g	274g	276g
Color	Black			Black/Silver		Black
Remark	With Clutch	-				

MTB Rear Derailleur							
Series	RD-M200/M210			RD-D300/D310		RD-D200	
Cage	Long	Short	Super Short	Long	Short	Long	Short
Speed	6/7/8s	6/7/8s	6/7/8s	8/9s	8/9s	6/7s	6/7s
Max. Sprocket	36T	36T	32T	36T	36T	36T	36T
Min. Sprocket	11T	11T	11T	11T	11T	11T	11T
Max. Front Difference	20T	12T	-	22T	22T	20T	20T
Capacity	45T	35T	23T	45T	35T	45T	35T
Guide Pulley	Composite With Steel Bushing		Composite With Bearing	Composite With Steel Bushing			
Tension Pulley	Composite With Steel Bushing		Composite With Bearing	Composite With Steel Bushing			
B-Knuckle	Composite						
B-Bolt	Steel						
P-Knuckle	Composite						
P-Pivot Seal	Steel						
Outer Link	Composite			Aluminum		Composite	
Inner Link	Steel						
Outer Cage	Steel						
Inner Cage	Composite		Steel			Composite	
Net Weight (g)	238g	269g	248g	281g	274g	238g	269g
Color	Black/Silver		Black				
Remark	-						

All the information or data in the catalog is tested by our company and for reference only. The final explanation is reserved by our company.